

SC-MIXAMPR40-Mic-100V

Audio Amplifier




- Stereo 2 x 40 Watt 4 ohm Amplifier
- 48V supported microphone
- Adjustable power between 70V and 100V
- Fast switch feature

This amplifier designed to stereo, microphone 2x40W analog audio megaphone and audio mixer. It directs inputs 2x40 Watt 4 Ohm outputs.

SC-MIXAMPR40-Mic-100V allows you to use with the buttons on the front panel such as volume etc. Additionally, it can control with S232 and IR remote.

Features

- Microphone input and other inputs are mixed and directed to the output
- Supports 3 level microphone input, condenser microphone, dynamic microphone and wireless microphone
- Supports 2 stereo audio inputs and 1 digital audio input
- Supports 40 Watt mono audio output
- Controlable with IR remote, front panel buttons and RS232

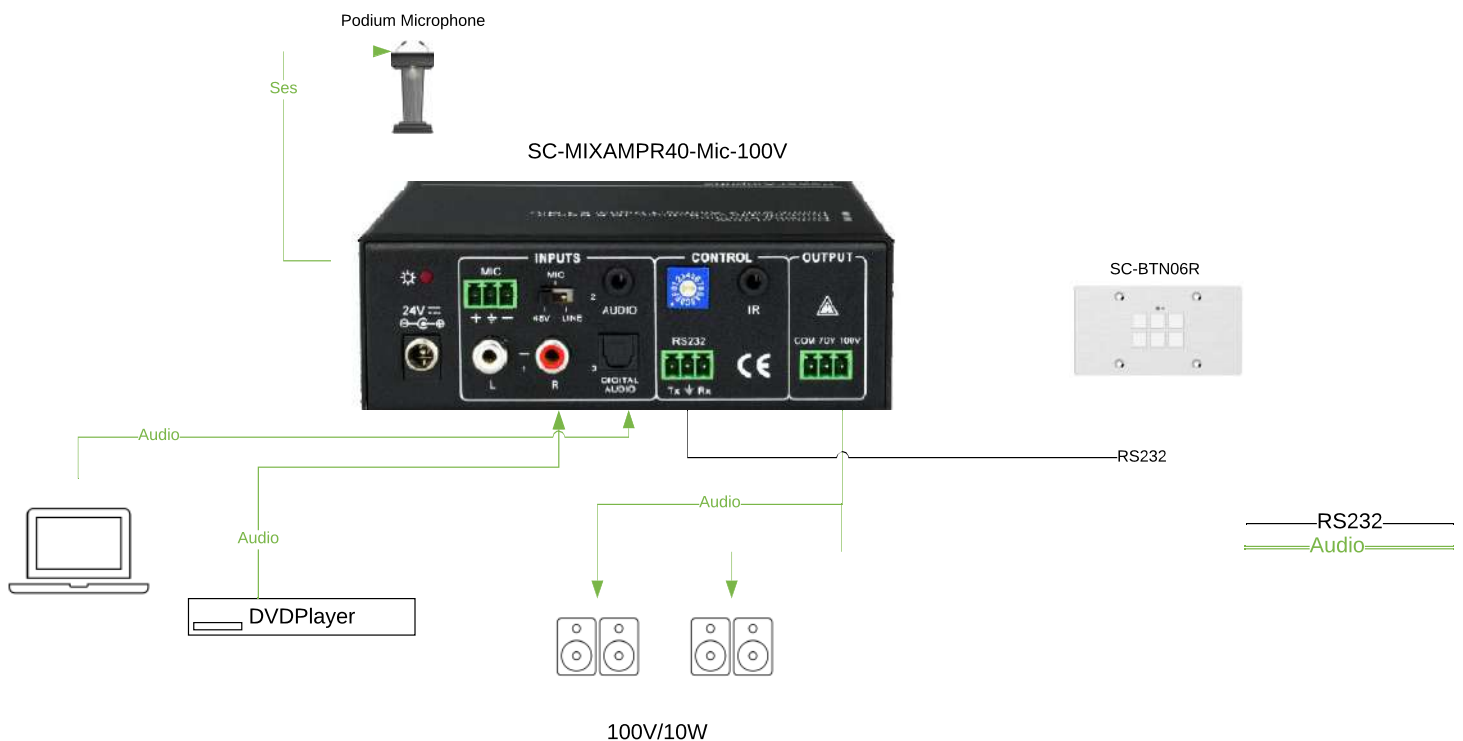

Input and Output

Inputs	2x Stereo RCA , 1x3.5mm Microphone, 1x Digital Fiber SPF
Outputs	1x 3.81mm Mono Amplifier
Output Features	1x 40W @ 4Ω SNR > 80dB 75@20Hz – 20kHz THD+N @ 1 %@1KHz 50W , 75dB @ 20Hz – 20kHz

Management Features

Hardware Software Upgrade	USB Port
Management Options	IR Remote ,RS232, Front Panel Buttons

General Features

Power Connection	24V DC 2.71Amp
Working Temperature	-10°C~40°C
Humidity Range	10~90% RH
Storage Temperature	-25°C~60°C
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimensions	130mm × 44mm × 144mm - W/D/H
Weight	860g
Power Value	5W
Mounting Type	Desktop

Certifications

EU/US	CE
-------	----

Package Details

Dimensions (packaged)	134mm×50mm×146mm- W/D/H
Weight (packaged)	900g
Package Content	1 x SC-MIXAMPR40-Mic-100V,RS232 Cable, 24V/2.71A DC Power Adaptor and Power Cable and 1 x User Manual



Front View



Rear View