

# SC-PSW0402R-A

## 4K Presentation Device 0402




- 18 Gbps 4K@50/60Hz 4:4:4 8 Bit ,
- 4 x HDMI Input, 2 x HDMI Output,
- Supports HDMI 2.0 DP 1.0 and HDCP 2.2
- 4x2 Matrix
- EDID Management

SC-PSW0402R-A has a scalable switching feature and designed for meeting rooms and VIP rooms

SC-PSW0402R-A can manage over Rs232, front panel buttons and remote control

### Feature

- 4K featured, 4 HDMI input and 2 HDMI output
- 18Gbps 4K@60 4:4:4 8 Bit
- Supports 10,12 Bit HDR and HDCP 2.2
- Up to 60 bit @ 1080p 16 bit depth color input and output support
- Selectable automatic switching feature for each output
- It can manage over Rs232, front panel buttons and remote control
- Supports multiple audio format switch as 8 channel include LPCM Bitstream, Hd Stream
- Internal or external EDID management

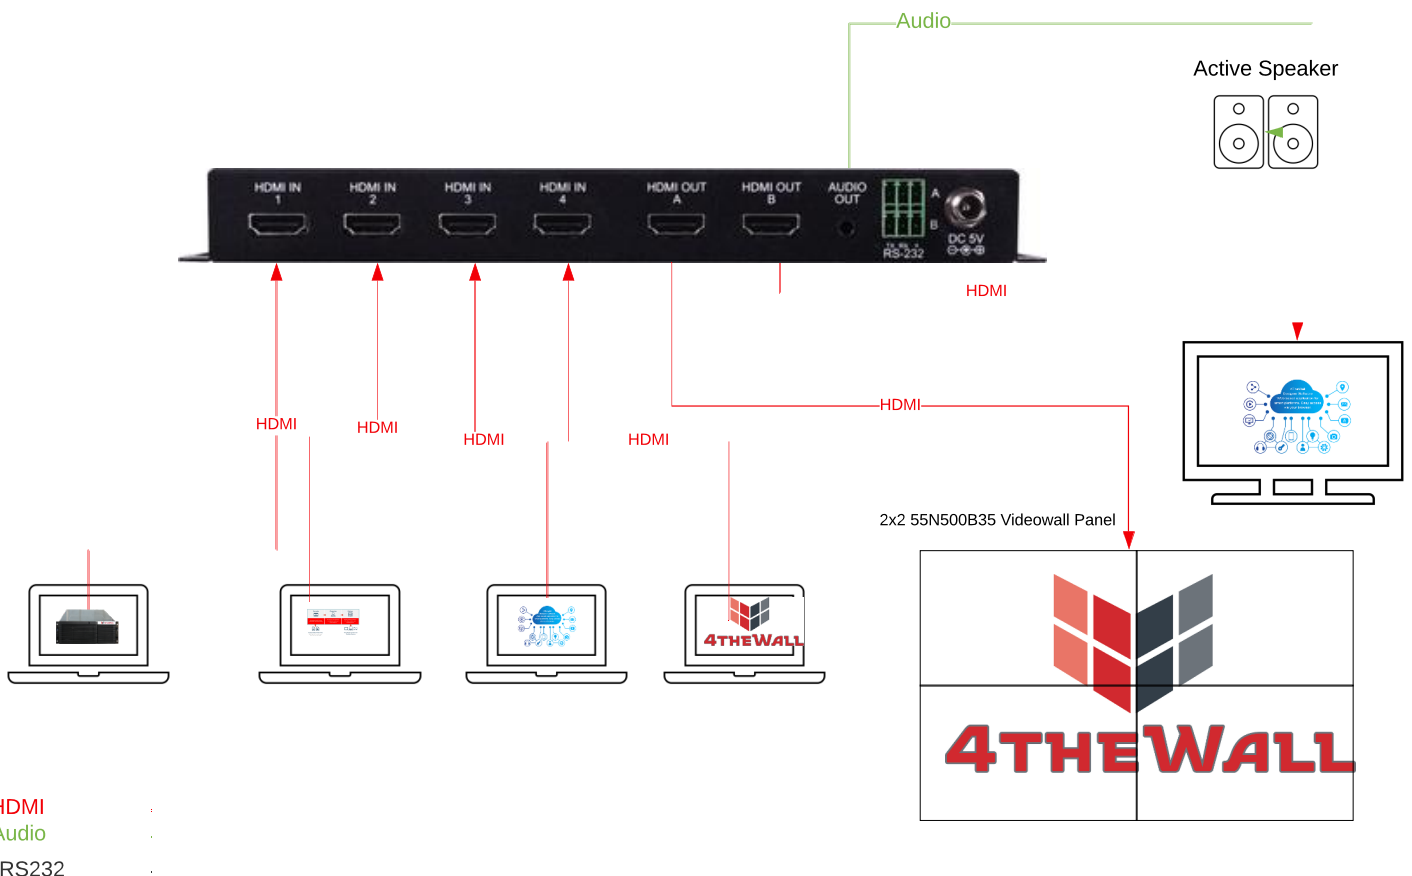

**Input and Output**

Video Inputs	4 x 4K HDMI , HDCP 2.2
Audio Inputs	4 x HDMI embedded audio input
Video Outputs	2 x 4K HDMI and 3.5 mm stereo
Audio Outputs	2 x 4K HDMI matrix and scaled video output and 3.5 mm stereo audio output
Resolutions	4K@50/60Hz (4:4:4, 8-bit) - 4K@50/60Hz (4:2:0, 10-bit HDR)

**Network Features**

Ethernet	N/A
IP Address Features	N/A

**Management Features**

Hardware Software Upgrade	USB
Management Options	RS232,Front Panel,Remote Control

**General Features**

Power Connection	5V DC 2.6 Amp (Lockable)
Working Temperature	0°C~40°C / 32°F~104°F
Humidity Range	20~90% RH
Storage Temperature	-20°C~60°C / -4°F~140°F
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimensions	231.5mm × 108mm × 25mm - Width/Depth/Height
Weight	620g
Power Value	8.62W
Mounting	1U 19" rack compatible (optional accessory)

**Certifications**

EU/USA	CE / FCC
--------	----------

**Package Details**

Dimensions (packaged)	231.5mm x 117mm x 25mm - Width/Depth/Height
Weight (packaged)	630kg
Package Content	1x SC-SW04042R-A, 1xIR Remote Control , 1xConnector Set, 1xRS232 Cable, 5V/2.6A DC Power Adaptor and Power Cable, 1x User Manual



Front View



Rear View