

# SC-GW010808-RS/DMX-RL-10V





## Control Management Device

- 8xRS232 Input
- 8 x Voltage and 8 Relay Output
- PoE capable control port


SC-GW010808-RS / DMX-RL-10V easy-to-use control management device is an ideal for meeting rooms, conference rooms or VIP rooms

### Features

- Supports 8 Relay, 8 PWM, 8 Voltage and 1 serial control output
- Configurable serial output supports RS-232/422/485 with an adjustable baud rate
- Supports adjustable 10V
- 30V / DC, up to 10A power
- Supports 5V / 2.6A ~ 24V / 1.2A DC power supply
- Control port supports receiving power via PoE
- Supports USB and WebGUI device software update
- Control with RS232 and Telnet control interfaces

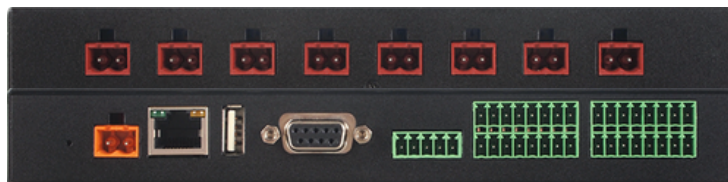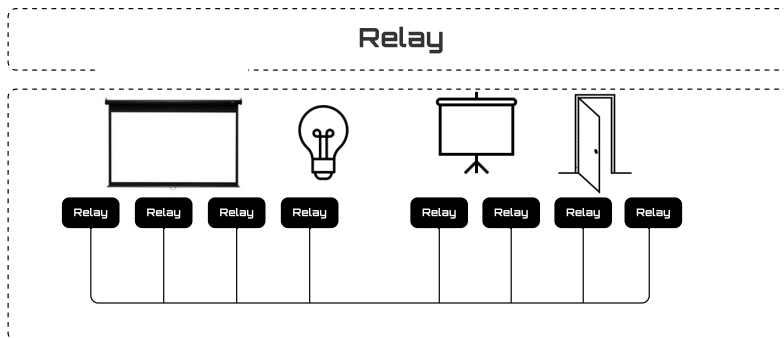

SC-GW010808-RS/DMX-RL-10V



## Technical Specifications

SC-GW010808-RS/DMX-RL-10V

Input and Output	
Inputs	1 x RJ45, 1 x RS232 (9-Pin D-sub)
Outputs	8 x Relay , 8 x Voltage and 1 x RS232/RS-422/RS-485/DMX512
Network Features	
Ethernet	1x RJ45
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB, WebGUI
Management Options	Telnet, RS232
General Features	
Power Connections	5V 2.6A
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±8kV (air-gap discharge) ±4kV (connection discharge)
Dimensions	200mm x 26mm x 90mm - W/D/H
Weight	548g
Mounting Type	Desktop
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	205mm x 30mm x 94mm - W/D/H
Weight (packaged)	600g
Package Contents	1 x SC-GW010808-RS/DMX-RL-10V, 5V/2.6A DC Power Adapter and Power Cable, 1 x User Manual



Front View



Rear View