

# SC-GW020808E-RS-IR-RL

## Control Management Device




- 1xIR Input and 8 Trigger Input
- 8 IR and 8 Relay Output

SC-GW020808E-IRS-IR-RL easy-to-use control management device is an ideal for meeting rooms, conference rooms or VIP rooms

### Features

- Supports 1 IR Learning input, 8 IR Blaster outputs, 8 Trigger inputs, 8 Relay outputs, 2 COM ports and 4 Ethernet ports
- Supports baud rates up to 4800bps to 115200bps
- Supports trigger inputs with a voltage range of 0 ~ 15V
- Controlled by multiple user control interfaces including WebGUI, Telnet and RS-232

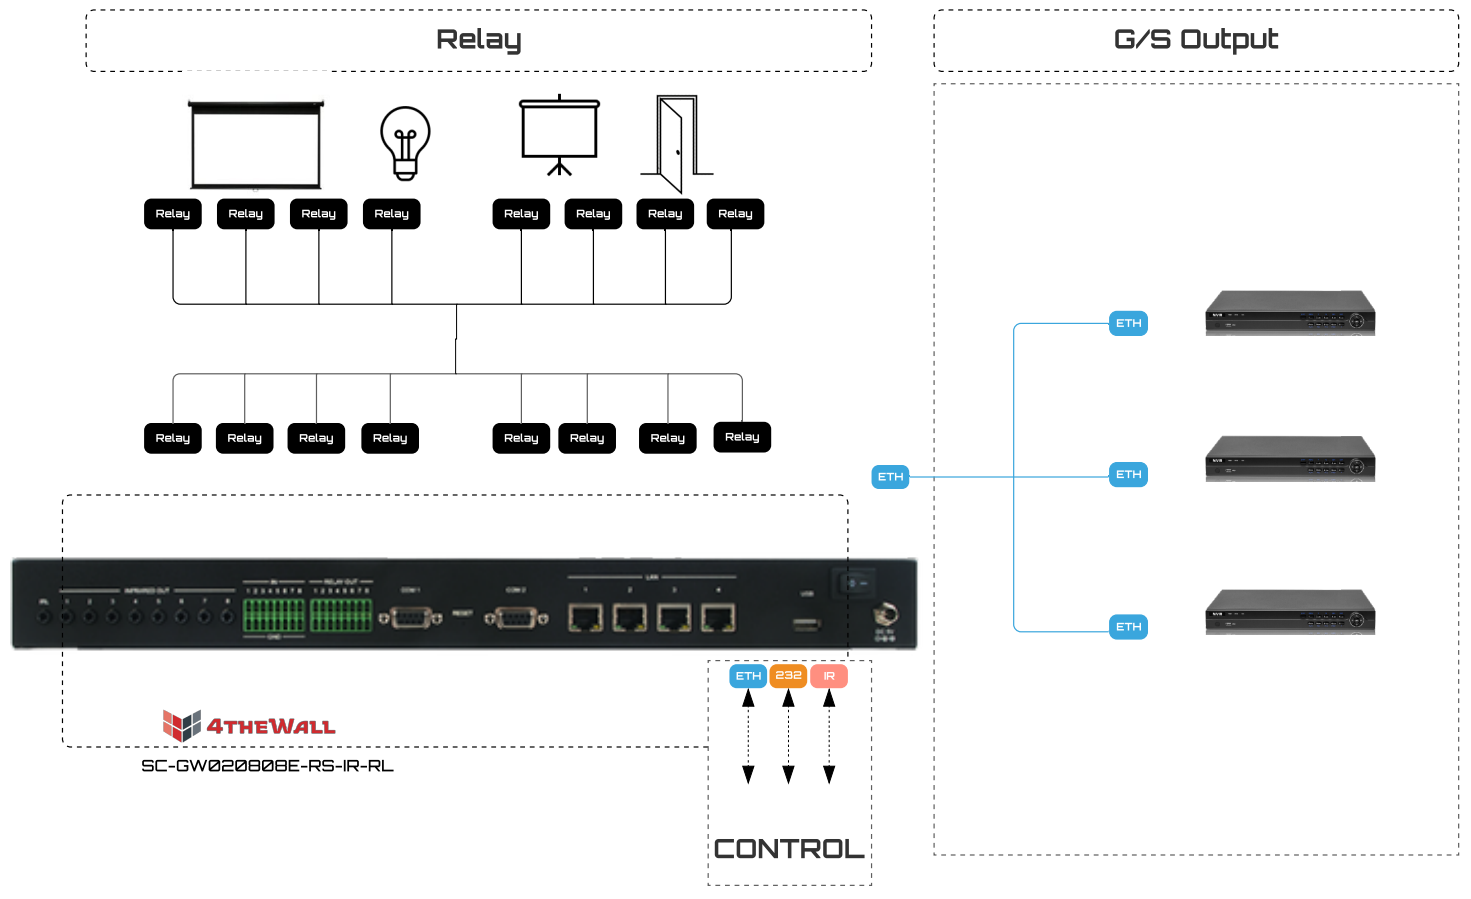

## Technical Specifications

SC-GW020808E-RS-IR-RL

Input and Output	
Inputs	1 x IR (3.5mm) and 8 Trigger
Input Features	IR frequency 30 - 50kHz
Outputs	8 x IR (3.5mm), 8 x Relay, 2 x COM(9-pin D-sub),4 x LAN
Output Features	IR frequency 30 - 50kHz
Network Features	
Ethernet	1 x RJ45
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB
Management Options	WebGul, Telnet ,IR Remote and RS232
General Features	
Power Connections	5V 2.6A
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±12kV (air gap discharge) ±8kV (connection discharge)
Dimensions	432mm x 44mm x 174mm - W/D/H
Weight	2186g
Power Value	7.7W
Mounting Type	Desktop
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	435mm x 45mm x 175mm - W/D/H
Weight (packaged)	2200g
Package Content	1 x SC-GW020808E-RS-IR-RL, 1 x IR Remote Control, 1 x IR Cable, 1 x 5V/2.6A DC Power Adaptor and Power Cable, 1 x User Manual



Front View



Rear View