

SC-GW040401-IR-RL-RS-DMX512

Control Management Device




- 1xIR Input
- 8 Trigger Input, 4 Relay Output and 4 IR Output


SC-GW040401-IR-RL-RS-DMX512 control management device is an ideal solution for meeting rooms, conference halls or VIP rooms.

Features

- 4 relay trigger output for control 3. party devices such projector screens
- 4 IR output for control TV , media player devices,
- Power support over POE,
- To control with multiple control interfaces includes WebGUI, Telnet and RS-232

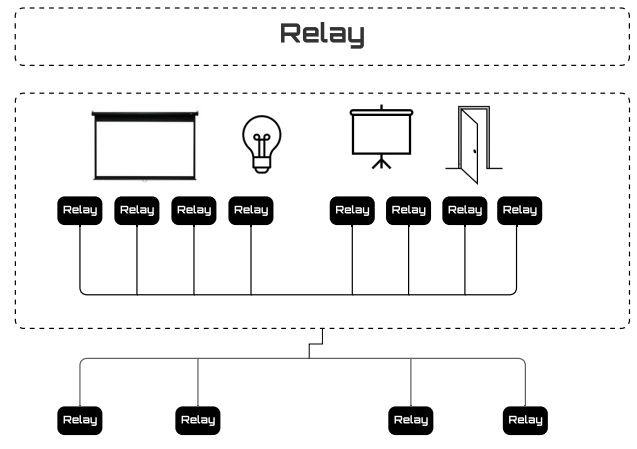

SC-GW040401-IR-RL-RS-DMX512



Input and Output	
Inputs	1x IR (3.5mm) and 8 Trigger
Input Features	IR Frequency 30 - 50kHz
Outputs	4xIR (3.5mm), 4xRelay, 1xCOM
Output Features	IR Frequency 30 - 50kHz
Network Features	
Ethernet	IP
IP Address Feature	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB
Management Options	WebGul, Telnet and RS232
General Features	
Power Connection	5V 2.6A
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±12kV (air-gap discharge) ±8kV (connection discharge)
Dimensions	128mm x 108mm x 25mm - Width/Depth/Height
Weight	400g
Power Value	3.63W
Mounting Type	Desktop
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	128mm x 118mm x 27mm - Width/Depth/Height
Weight (packaged)	430g
Package Content	1 x SC-GW040401-IR-RL-RS-DMX512, 4x IR Cable, 5V/2.6A DC Power Adaptor and Power Cable, 1x User Manual



Front View



Rear View