

SC-GW061612E-RS-IR-RL

Control Management Device





- 6 x RS232 Input
- 16 IR and 12 Relay Output


SC-GW061612E-RS-IR-RL control management device is an ideal for meeting rooms, conference rooms or VIP rooms

Features

- 16 IR Blaster outputs, 12 Relay outputs, 6 COM ports and 1 Ethernet port
- With 50 individual ports, some of which are capable of controlling several pieces of equipment
- Allows connection of multiple simultaneous client devices (iOS/ Android etc)
- Independent control system gateway control feature
- For larger systems, multiple SC-GW061612E-RS-IR-RL can exist on the same network
- It can be controlled with TCP/IP control interfaces

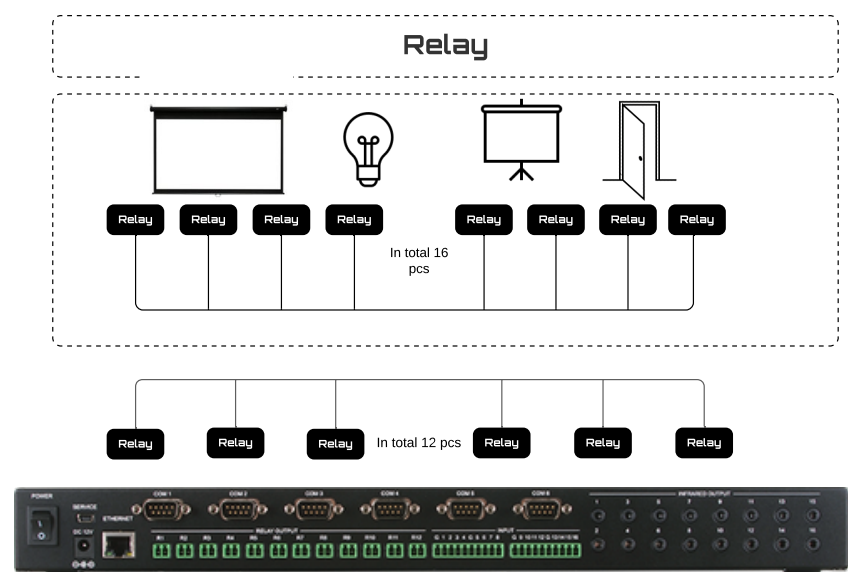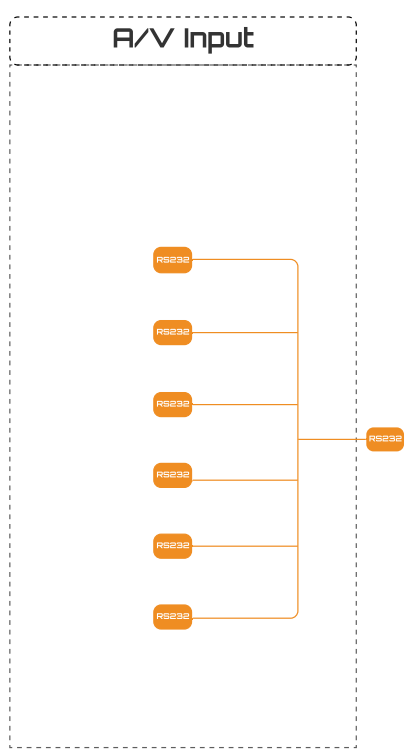

4THEWALL
SC-GW061612E-RS-IR-RL



Input and Output	
Inputs	1 x RJ45, 6 x RS232 (COM) and 16 x Relay (Voltage Free)
Input Features	IR Frequency 30 - 50kHz
Outputs	12 x Relay and 16 x IR
Output Features	IR Frequency 30 - 50kHz
Network Features	
Ethernet	IP
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB
Management Options	TCP/IP, RS232
General Features	
Power Connection	12V DC
Working Temperature	0°C~ +30°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±12kV (air gap discharge) ±8kV (connection discharge)
Dimensions	430mm x 180mm x 50mm - W/D/H
Weight	2209g
Power Value	1.5W
Mounting Type	Desktop
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	435mm x 184mm x 55mm - W/D/H
Weight (packaged)	2230g
Package Contents	1 x SC-GW061612E-RS-IR-RL, 8 x IR Emitters, 12 x Relay Output Connector ,2 x Input Block Connector, 12V DC Power Supply and Power Cable, 1 x User Manual



Front View



Rear View