

SC-PSWE0201-MixAMPE30

4K Presentation Device 0201




- 2 x HDMI Input, 1 x Line, 1 x RCA, 1 x Optical Audio Input
- 1 x HDMI and 1 x RCA, 1 x Optical Audio Stereo Output

It has a presentation feature designed for meeting rooms and VIP rooms, crisis centers, and data monitoring centers

You can access the ability to transfer your presentation images and transmit the sounds with a single device with using SC-PSW 0201-MixAMPE30

Features

- Supports 2 HDMI Input, 1 HDMI Output
- Fixed or variable analog audio output feature
- Stereo Audio Output
- Web GUI, Telnet and RS232 control feature

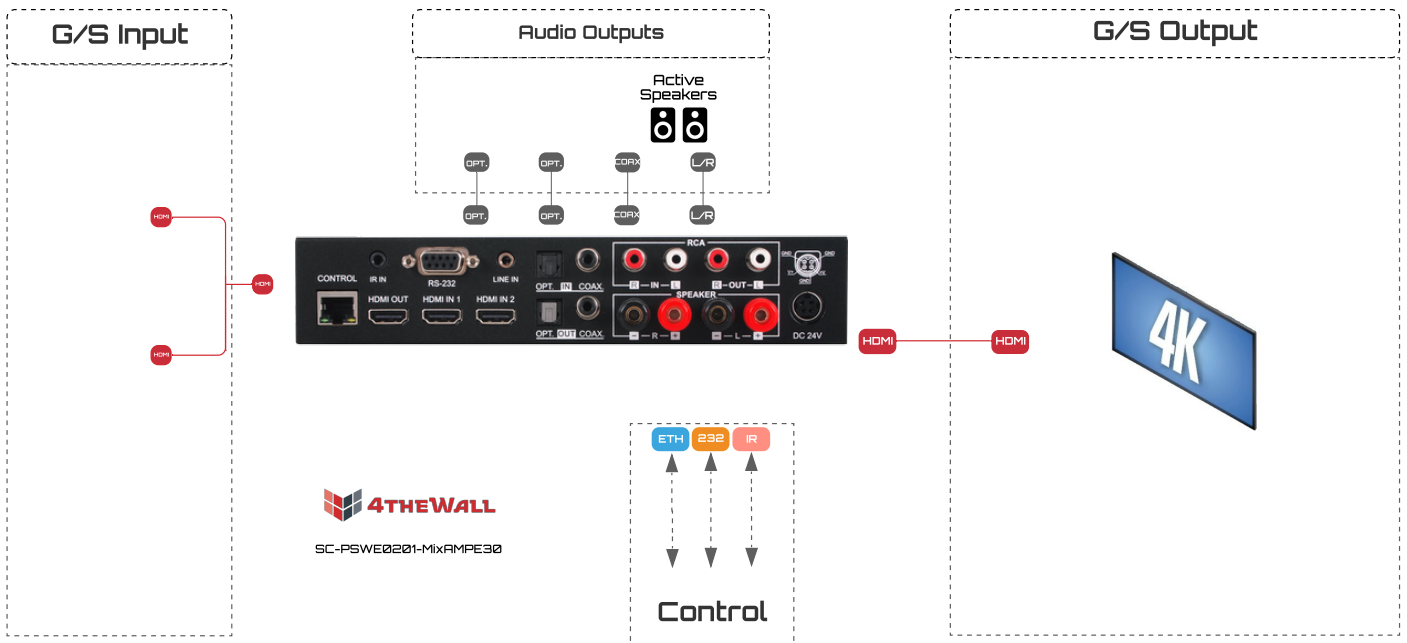

Technical Specifications

SC-PSWE0201-MixAMPE30

Input and Output	
Video Inputs	2 x HDMI
Audio Inputs	1 x Optical, 1 x Coaxial, 1 x 3.5mm Mini-jack, 2 x RCA (Analog Stereo)
Video Outputs	1 x HDMI 15m@1080p/12-bit
Audio Outputs	1 x Optical, 1 x Coaxial, 2 x RCA (Analog Stereo), 1 x Speaker
Network Features	
Ethernet	1 x RJ45
IP Address Feature	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB
Management Options	RS232 and Telnet/Web GUI
General Features	
Power Connection	24V/ DC 3.75 Amp
Working Temperature	0°C~40°C
Humidity Range	20~90% RH
Storage Temperature	-20°C~60°C
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimensions	215mm × 172.5mm × 46mm - W/D/H
Weight	1.6 kg
Power Value	82.5W
Mounting Type	Compatible with 1U 19" Rack
Certification	
EU/US	CE
Package Details	
Dimensions (packaged)	218mm x 174mm x 48mm - W/D/H
Weight (packaged)	1.12 kg
Package Content	1 x SC-PSWE0201-MixAMPE30 1 x Connector Set , 1 xIR Extender Cable, 1 x IR Eye Cable, 1 x User Manual



Front View



Rear View