

SC-SW0402E-Seamless-HDBO-Mic-A

4K Switcher 0402



- 4K@60Hz 4:4:4 , HDMI 2.0
- 3xHDMI, 1xUSB-C Input, 2xHDMI Output
- HDMI/HDBaseT Matrix Output
- Seamless


This seamless switcher is ideal for meeting and VIP rooms

SC-PSW0402E-Seamless-HDBO-Mic-A is a perfect matrix switcher device with its mixer function

Phantom feeding microphone and Mixer stereo audio input, audio embedding and audio de-embedding feature

Features

- 4K supported, 3xHDMI 2.0, 1xUSB-C input and 2xHDMI output,
- Seamless matrix HDMI/HDBaseT output,
- Supports 18G 4K@60 4:4:4 HDR 10 and HDCP 2.2,
- Phantom feeding microphone input,
- Supports HDBaseT POC output,
- Supports automatic scaling features for all inputs,
- Audio embedding and audio mixer feature,
- Supports optical and stereo audio output (De-embedder)
- Supports automatic input matrix on the fullscreen mode,
- Front panel control button,
- HDBaseT 4K@30 Hz 40Meter, 1080p 70 Meter
- IR,Relay, RS232 and ethernet (UI) control function

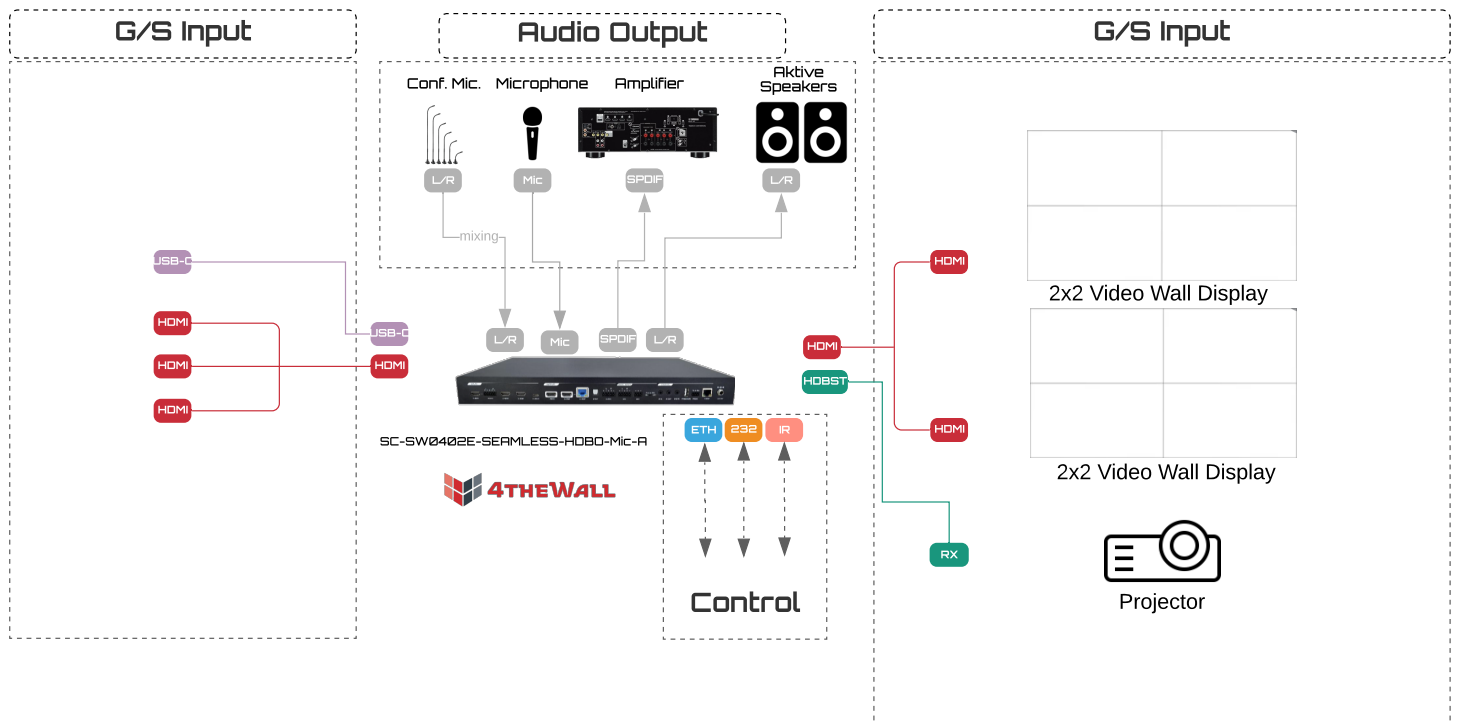

Input and Output

Video Inputs	3 x HDMI 2.0, 1 x USB-C Input
Audio Inputs	3 x HDMI embedded, 1 x Phantom feeding microphone, 1 x Line Stereo and 1 x Mixer audio input
Video Outputs	2 x 4K HDMI and HDBaseT video output
Audio Outputs	2 x Embedded audio, 1 x Optical and stereo mixer audio output
Resolutions	Maximum 18G 4K@60 Hz 4:4:4 HDR 10

Network Features

Ethernet	1x RJ45 100Mbit
IP Address Features	DHCP, Local Link , Fixed IP

Management Features

Hardware Software Upgrade	Ethernet
Management Options	Web user interface, Relay, RS232, IR, API, Front panel buttons

General Features

Power Connection	24V DC 2.7 Amp
Working Temperature	0°C~40°C / 32°F~104°F
Humidity Range	20~90% RH
Storage Temperature	-20°C~60°C / -4°F~140°F
Dimensions	436.4mm x 265mm x 44mm - Width/Depth/Height
Weight	2.15kg
Power Value	58.3W
Mounting	Compatible 1U 19" Rack mount

Certifications

AB/ABD	CE
--------	----

Package Details

Dimension (packaged)	545mm x 345mm x 150mm - Width/Depth/Height
Weight (packaged)	4kg
Package Content	1 x SC-SW0402E-Seamless-HDBO-Mic-A, 2 x Mounting Ears, 1 x IR Remote, 1 x IR Receiver, 1 x Connector Set, 1 x RS232 Cable, 1 x Power Adaptor (24V DC 2.71A), 1 x User Manual



Front View



Rear View