

# SC-SW0404E-Automation

## 4K Matrix Switcher 0404




- 4x4 HDMI Matrix
- 3D 4K UHD Supported
- 10.2 Gbps 4Kx2K@50/60Hz 4:2:0
- Smart EDID Management

This matrix switcher has an ideal 4K content management for meeting rooms, conference halls or lecture halls.

SC-SW0404E--Automation can be controlled with IR , RS-232, WebGUI and Telnet

### Features

- 4x4 HDMI Matrix
- 10.2Gbps 4096×2160@24/25/30Hz and 4096×2160@50/60Hz (4: 2: 0) HDCP 1.4,
- Supports LPCM 2.0/5.1/7.1 audio formats and Bitstream features,
- HDCP support control standard and Apple mode per input,
- Support 8 trigger inputs with 0-15 V range,
- Smart EDID Management
- Control with IR remote control, RS232, WebGUI and Telnet

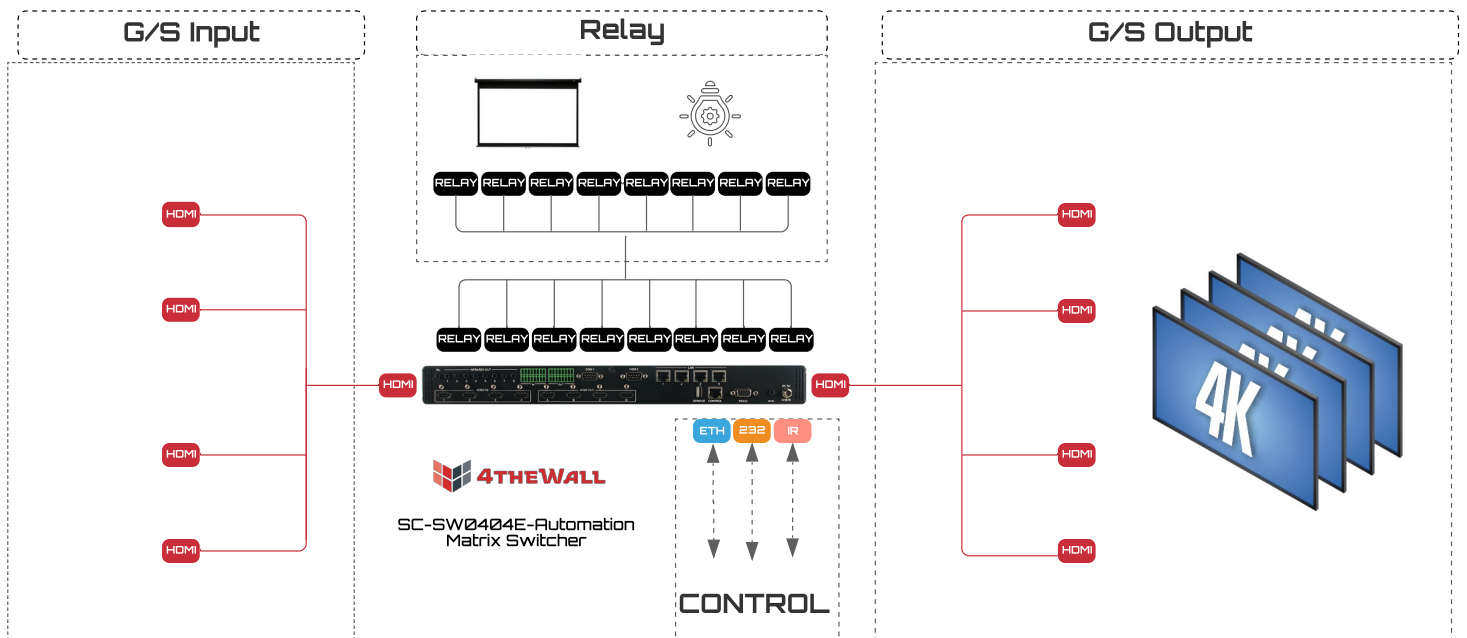

Input and Output	
Inputs	4 x HDMI , 1 x IR (3.5mm), 5 x IR Extender and 8 x Trigger
Input Features	HDMI 10m (1080p@60Hz, 12-bit) 5m (4K@60Hz, 4:2:0, 8-bit)
Outputs	4 x HDMI , 8 x Relay , 4 x LAN(RH45) and 2 x COM
Output Features	480i@60Hz - 4K@60Hz (4:2:0) VGA@60Hz - WUXGA@60Hz (RB), ve (CAT5e/6) 100m (1080p@60Hz, 12-bit) 70m (4K@60Hz, 4:2:0, 8-bit) 10.2 Gbps bandwidth
Network Features	
Ethernet	IP
IP Address Features	DHCP, Fixed IP
Management Features	
Harware Software Upgrade	USB port
Management Options	IR Remote control, RS232 , Telnet, WebGUI and Front panel buttons
General Features	
Power Connections	5V DC 6 Amp
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±12kV (air gap discharge) ±8kV (connection discharge)
Dimensions	438mm × 269mm × 44mm - W/D/H
Weight	3258g
Power Value	16.5W
Mounting Type	Desktop
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	482mm x 274mm x 49mm - W/D/H
Weight (packaged)	3390g
Package Content	1 x SC-SW0404E-Automation, 1 x Remote Control , 1 x Connector , 1 x IR Cable, 1 x 5V/6A DC Power Adaptor and Power Cable, 1x User Manual



Front View



Rear View