

SC-SW0404E-HDBO-Automation

4K Matrix Switcher 0404




- 4x4 Matrix
- 3D 1080p Video
- 10.2 Gbps 4Kx2K@50/60Hz 4:2:0
- Smart EDID Management

This matrix switcher with 4K content management is ideal solution for meeting rooms, conference rooms or lecture halls

SC-SW0404E-HDBO-Automation can control with IR , RS-232, WebGUI and Telnet

Features

- 4x4 HDMI and HDBaseT Matrix
- Supports 10.2Gbps 4K@50/60Hz 4:2:0 , HDCP 1.4,
- Supports LPCM 2.0/5.1/7.1 audio formats and Bitstream features,
- HDCP support control per input Standard and Apple Mode,
- Support 8 trigger inputs with 0-15 V range,
- Smart EDID Management Feature,
- Controllable from front panel , IR remote, RS232, WebGUI and Telnet

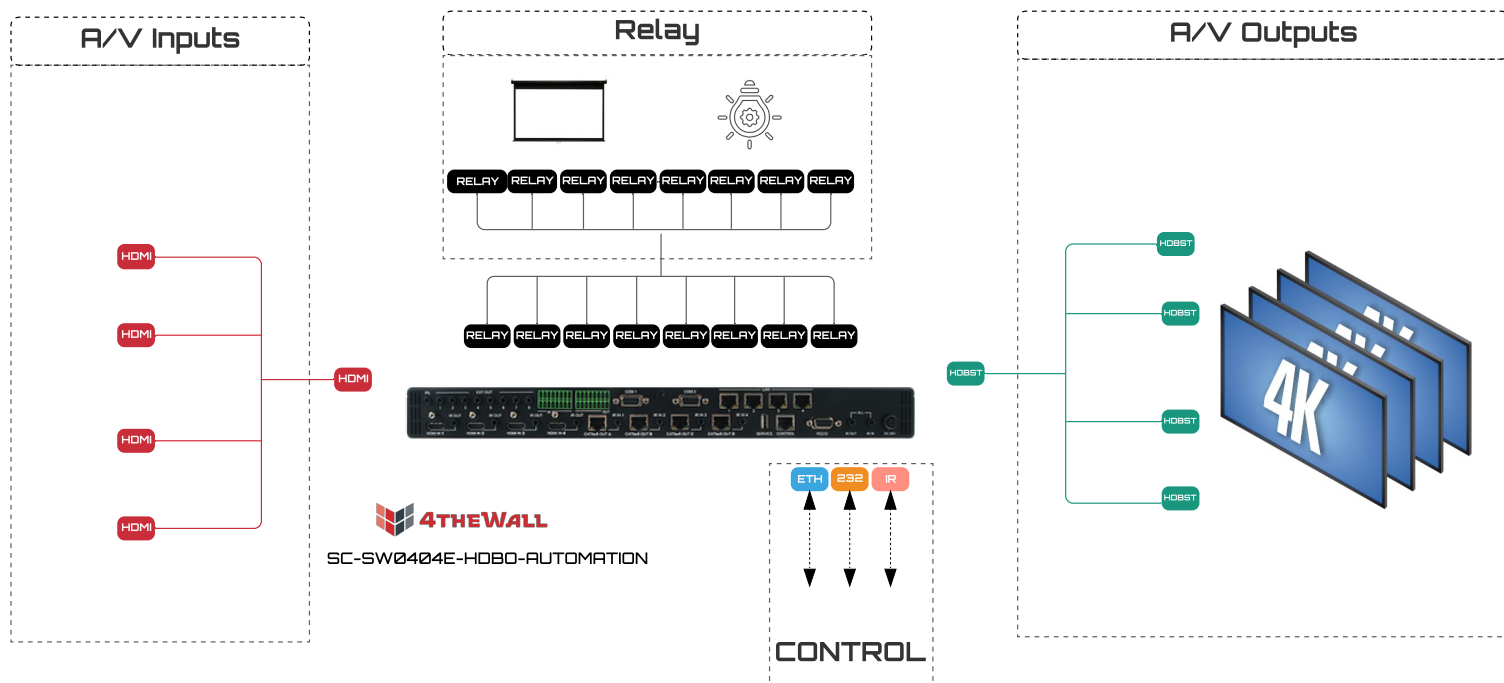

Input and Output	
Inputs	4 x HDMI , 1 x IR (3.5mm), 5 x IR Extender and 8 x Trigger
Input Features	HDMI 10m (1080p@60Hz, 12-bit) 5m (4K@60Hz, 4:2:0, 8-bit)
Outputs	4 x HDBaseT , 8 x Relay , 4 x LAN(RH45) and 2 x COM
Output Features	480i@60Hz - 4K@60Hz (4:2:0) VGA@60Hz - WUXGA@60Hz (RB) and (CAT5e/6) 100m (1080p@60Hz, 12-bit) 70m (4K@60Hz, 4:2:0, 8-bit) 10.2 Gbps bandwidth
Network Features	
Ethernet	1 x RJ45
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgarde	USB port
Management Options	IR remote, RS232 , Telnet, WebGUI and front panel buttons
General Features	
Power Connection	24V DC 2.7A
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±12kV (air gap discharge) ±8kV (connection discharge)
Dimensions	438mm x 269mm x 44mm - W/D/H
Weight	3450g
Power Value	61W
Mounting Type	Desktop
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	482mm x 274mm x 49mm - W/D/H
Weight (packaged)	3470g
Package Content	1 x SC-SW0404E-HDBO-Automation, 1 x IR Remote Control , 1 x Connector Set, 1 x IR Cable, 24V/2.7A DC Power Adaptor and Power Cable, 1 x User Manual



Front View



Rear View