

SC-DEC0201E-ETH-RX-SDVOE

4K Decoder




- 18 Gbps 4K @ 60Hz 4: 4: 4 8bit
- Supports HDCP 2.2. and HDMI 2.0
- 4K signal scaling feature
- Decoder Receiver

This device has 4K supported DEC feature ideal solution for meeting rooms , conference halls or crisis centers

SC-DEC0201E-ETH-RX -SDVOE can be used backbone of 4K UHD technological advance systems. You can transfer your network infrastructure along with KVM operating logic of HDMI/DP signals with using TCP/IP.


Features

- Supports 4K @ 60Hz 4: 4: 4 8bit, up to 1080P 3D HDMI 2.0 video resolution
- Supports 18Gbps high bandwidth and HDR 10 and Dolby Vision
- Ability to transmit and receive RS232 and IR signal to any unit using with Unicast (point to point) or Multicast(point to multiple point)
- Zero latency over IP with SDVoE compatible 4K@60 video operation feature
- Control with WebGUI, Telnet and front panel buttons

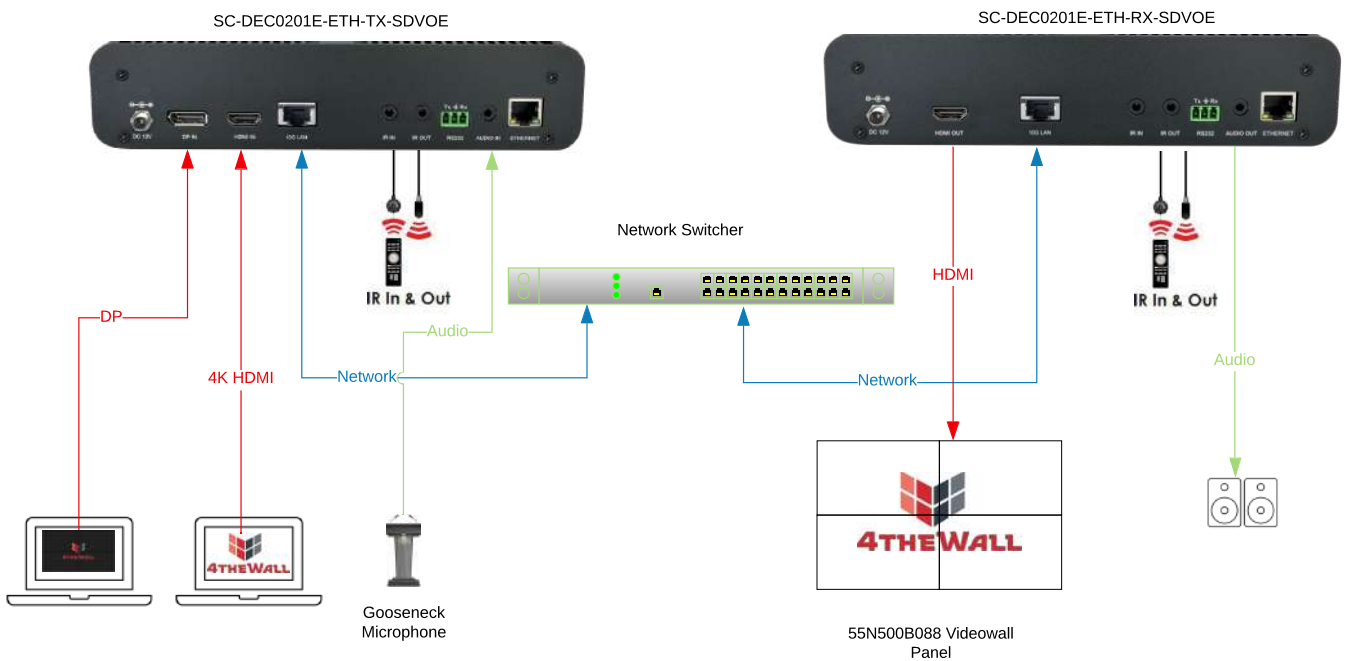

—HDMI/DP—
 —Audio—
 —Ethernet—

Input and Output	
Inputs	1 x RJ45
Input Features	4K x 2K@60Hz 4:4:4 8bit
Outputs	1 x HDMI, 1 x Cat.5e/6/7 and 1 x 3.5mm Stereo Audio
Output Features	Supports 4K x 2K@60Hz 4:4:4 8 bit 18 Gbps bandwidth
Network Features	
Ethernet	1 x RJ45
IP Address Feature	DHCP, Fixed IP
Management Features	
Hardware Software Feature	IP
Management Options	Ethernet, WebGUI, IR and RS232
General Features	
Power Connection	12V DC 2A
Working Temperature	-10°C~ +55°C
Humidity Range	10% ~ 90%
Storage Temperature	-25°C~ +70°C
ESD Protection	±12kV (air gap discharge) ±8kV (connection discharge)
Dimensions	224mm × 110mm × 49.2mm - W/D/H
Weight	1018g
Power Value	21W
Mounting Type	Desktop
Certifications	
EU/US	CoC
Package Details	
Dimensions (packaged)	225mm x 1mm x mm - W/D/H
Weight (packaged)	1030g
Package Content	1 x SC-DEC0201E-ETH-RX-SDVOE, 1 x RS232 Cable, 12V/2A DC Power Adaptor and Power Cable , 1 x User Manual

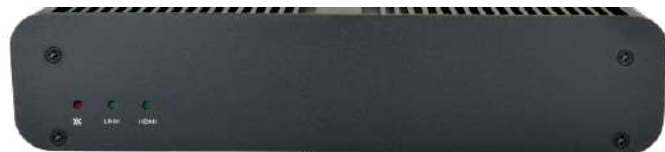

Front View



Rear View