

SC-PSW0201E-HDBI-AMP



4K Presentation Device 0201


- 18 Gbps 4K@60Hz HDMI
- 1 x HDMI Input and 1 x HDBaseT Input
- 1x HDMI and 1 Stereo (3.5 mm) and 1 x Stereo (2x2 pin) Output

This device has a receiver (voice and image transfer) feature designed for meeting rooms and VIP rooms, crisis centers, data monitoring centers.

SC-PSW0201E-HDBI-AMP can be control with front panel buttons, Web GUI, Telnet and RS232.

Features

- 4K and 3D featured, 1 HDMI, 1 HDBaseT input and 1 HDMI output,
- 3840x2160@60Hz 4:2:0 HDBaseT
- CEC Bypass,
- EDID and HDCP ,
- 2x2 Matrix Switching
- Stereo Audio Output
- USB Host selection with front panel control buttons
- Ability to automatic full screen to contents connected to inputs
- Controllable with front panel buttons, Web GUI, Telnet and RS232

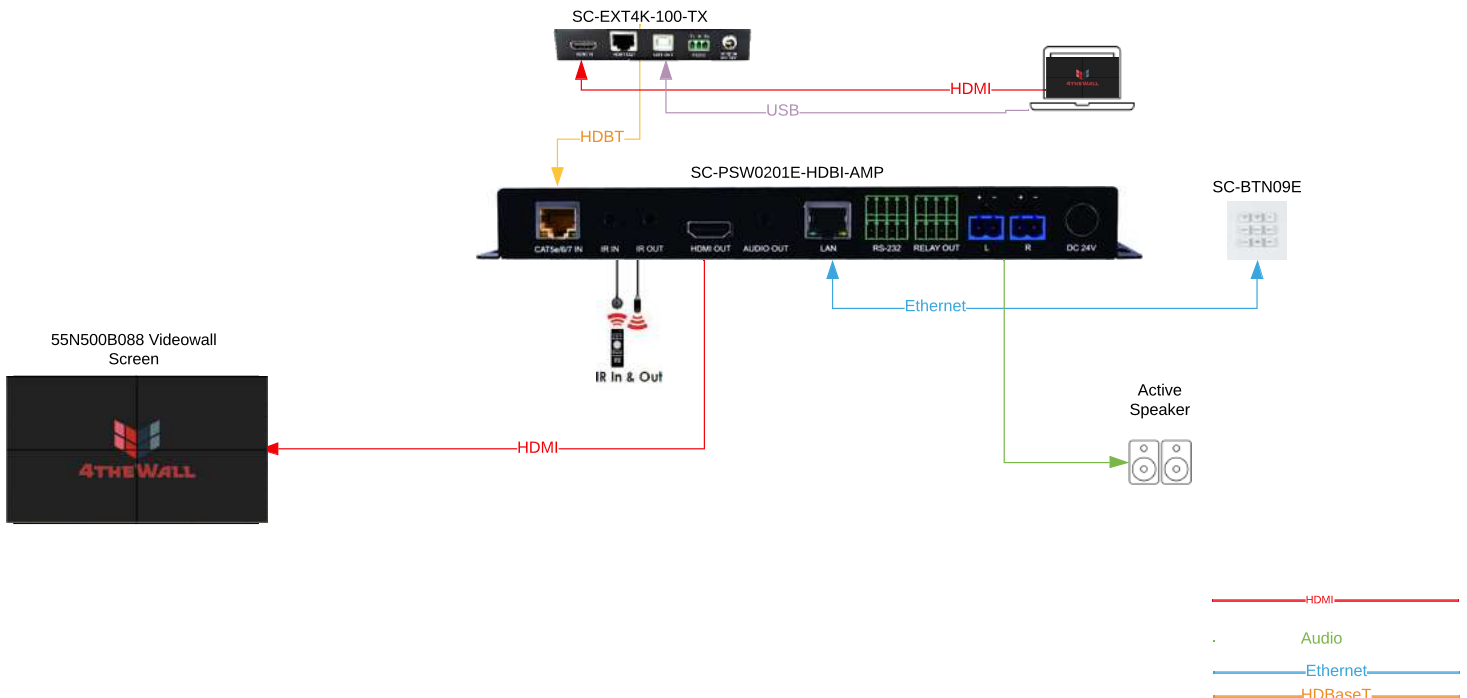

Input and Output	
Video Inputs	1x HDMI (Type-A), 1 x HDBaseT(RJ45)
Audio Inputs	1 x LR Pin
Video Outputs	1 x HDMI
Audio Outputs	1 x Stereo (3.5mm) and 1 x Stereo (2x2 pin) audio outputs
Resolutions	Maximum 4K@60 Hz 4:4:4
Network Features	
Ethernet	1x RJ45
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB
Management Options	Front Panel Buttons,Web GUI,RS232 and Telnet
General Features	
Power Connection	24V/ DC 3.75 Amp
Working Temperature	0°C~40°C
Humidity Range	20~90% RH
Storage Temperature	-20°C~60°C
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimensions	231.5mm × 108mm × 25mm - W/D/H
Weight	679g
Power Value	91.63W
Mounting Type	Compatible with 19" 1U Rack Cabinet
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	231.5mm x 112mm x 25mm - W/D/H
Weight (packaged)	710g
Package Content	1 x SC-PSW0201E-HDBI-AMP, 1 x Connector Set, 1 x IR Extender Cable, 1 x IR Eye Cable, 1 x User Manual



Front View



Rear View