

# SC-PSW0202E-HDBI-A

## 4K Presentation Device 0202




- 4K@60Hz
- 1 x HDMI Input and 1 x HDBaseT Input
- 2 x HDMI and 1 Stereo Output
- Receiver

This device has a receiver (AV transmission) feature ideal for meeting rooms and VIP rooms, crisis centers and data centers.

SC-PSW0202E-HDBI-A can control with front panel buttons ,Web GUI, Telnet and RS232

### Features

- Featured 4K and 3D , 1 HDMI, 1 HDBaseT input and 2 HDMI output,
- Supports HDBaseT 2.0
- 4K@60 4:4:4 and HDCP 2.2 ,
- 2x2 Matrix switcher feature,
- Stereo audio output support,
- USB main PC selection with front panel control buttons
- Ability to automatic full screen that contents linked to inputs,
- Controllable from front panel buttons ,Web GUI, Telnet and RS232

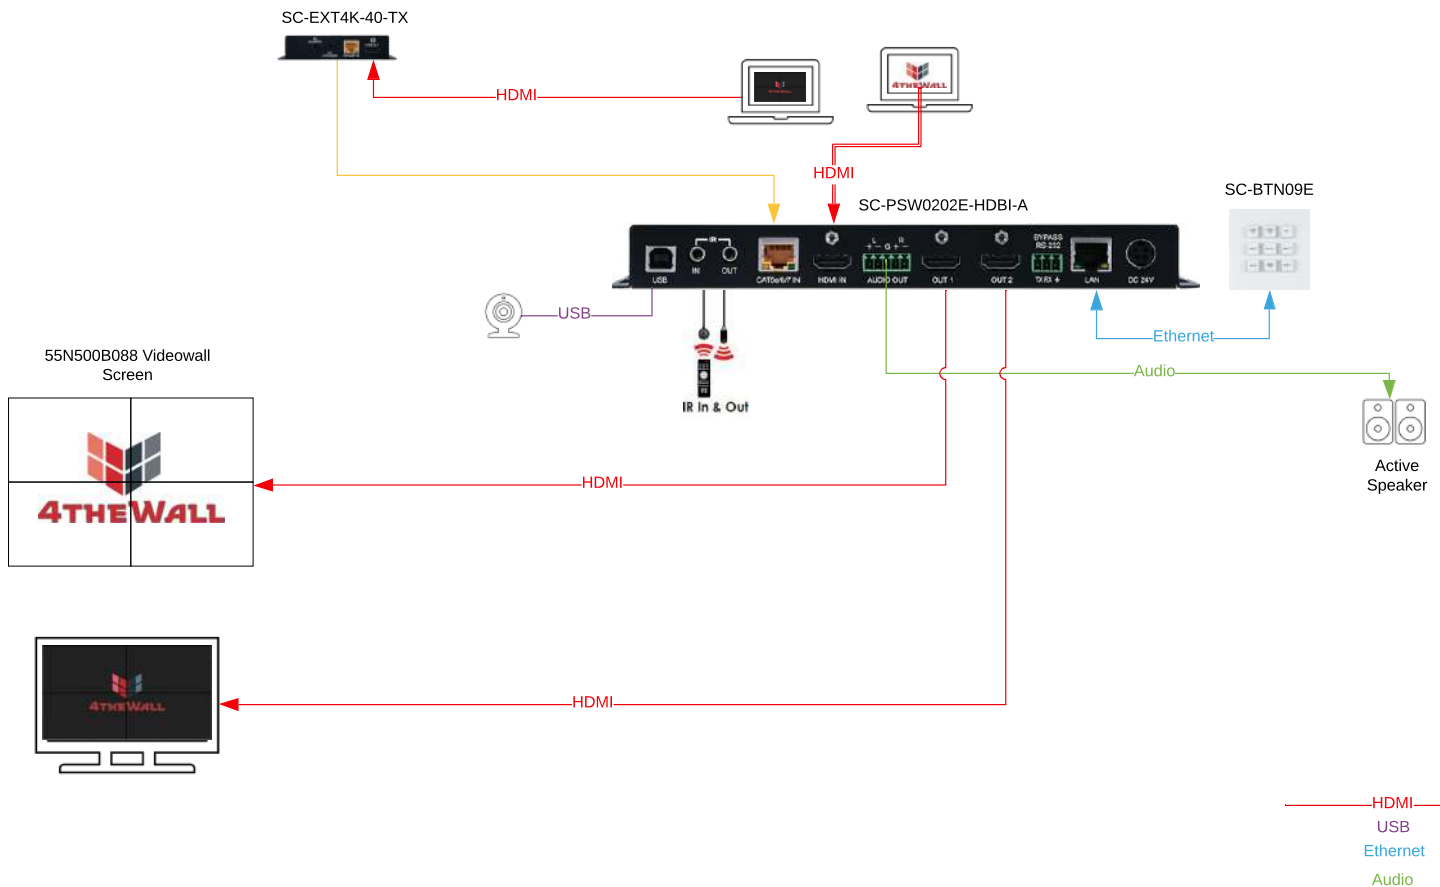

## Technical Specification

## SC-PSW0202E-HDBI-A

Input and Output	
Video Inouts	1 x HDMI (Type-A), 1 x HDBaseT(RJ45)
Features	Supports 18 Gbps(HDMI) and 10.2(HDBaseT) Gbps
Video Outputs	2 x HDMI
Audio Outputs	1 x HDMI and 1 x Analog audio output
Resolutions	Up to 4K@60 Hz 4:4:4
Network Features	
Ethernet	1 x RJ45
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB
Management Options	Front Panel Buttons,Web GUI,RS232 and Telnet
General Features	
Power Connection	24V/ DC 3.75 Amp
Working Temperature	0°C~40°C
Humidity Range	20~90% RH
Storage Temperature	-20°C~60°C
ESD Protection	±8kV (air-gap discharge) ±4kV (connection discharge)
Dimensions	231.5mm × 165mm × 25mm - W/D/H
Weight	895g
Power Value	22.33W
Mounting Type	Compatible with 19" 1U Rack Cabinet
Certification	
EU/USA	CE
Package Details	
Dimensions (packaged)	231.5mm x 174mm x 44mm - W/D/H
Weight (packaged)	928g
Package Content	1 x SC-PSW0202E-HDBI-A, 1 x Connector, 1 x IR Extender Cable, 1 x IR Cable, 1 x User Manual



Front View



Rear View