

SC-PSW0902E-HDBO-MixAMP

4K Presentation Device 0902




- 18Gbps 4K@60Hz 4:4:4
- 4 x HDMI , 2 x HDBaseT , 1 x USB-C and 2 x VGA Input
- 1 x Microphone and 6 x Line Audio Input
- 1 x HDMI , 1 x HDBaseT , 1 x Stereo(5.5 pin) and 1 x Stereo (2x2 pin) Output
- Transmitter

This device has a transmitter feature designed for meeting rooms and VIP rooms, crisis centers and data centers.

SC-PSW0902E-HDBO-MixAMP is de-embed the sound of the sources connected to HDMI inputs and embed the microphone and line inputs with the mixer feature

Features

- Supports 1920x1080@60Hz VGA input,
- HDBaseT Supported
- 4K@60 4:4:4 and HDCP 2.2 supported,
- Audio mixer feature,
- Supports stereo audio output,
- Supports microphone input,
- Supports EDID
- Supports automatic input selector in full screen mode,
- Front panel control buttons
- Ability to automatic full screen content connected to inputs
- Controllable with front panel, Web Gui, Telnet ,Triggers, RS232 and Ethernet

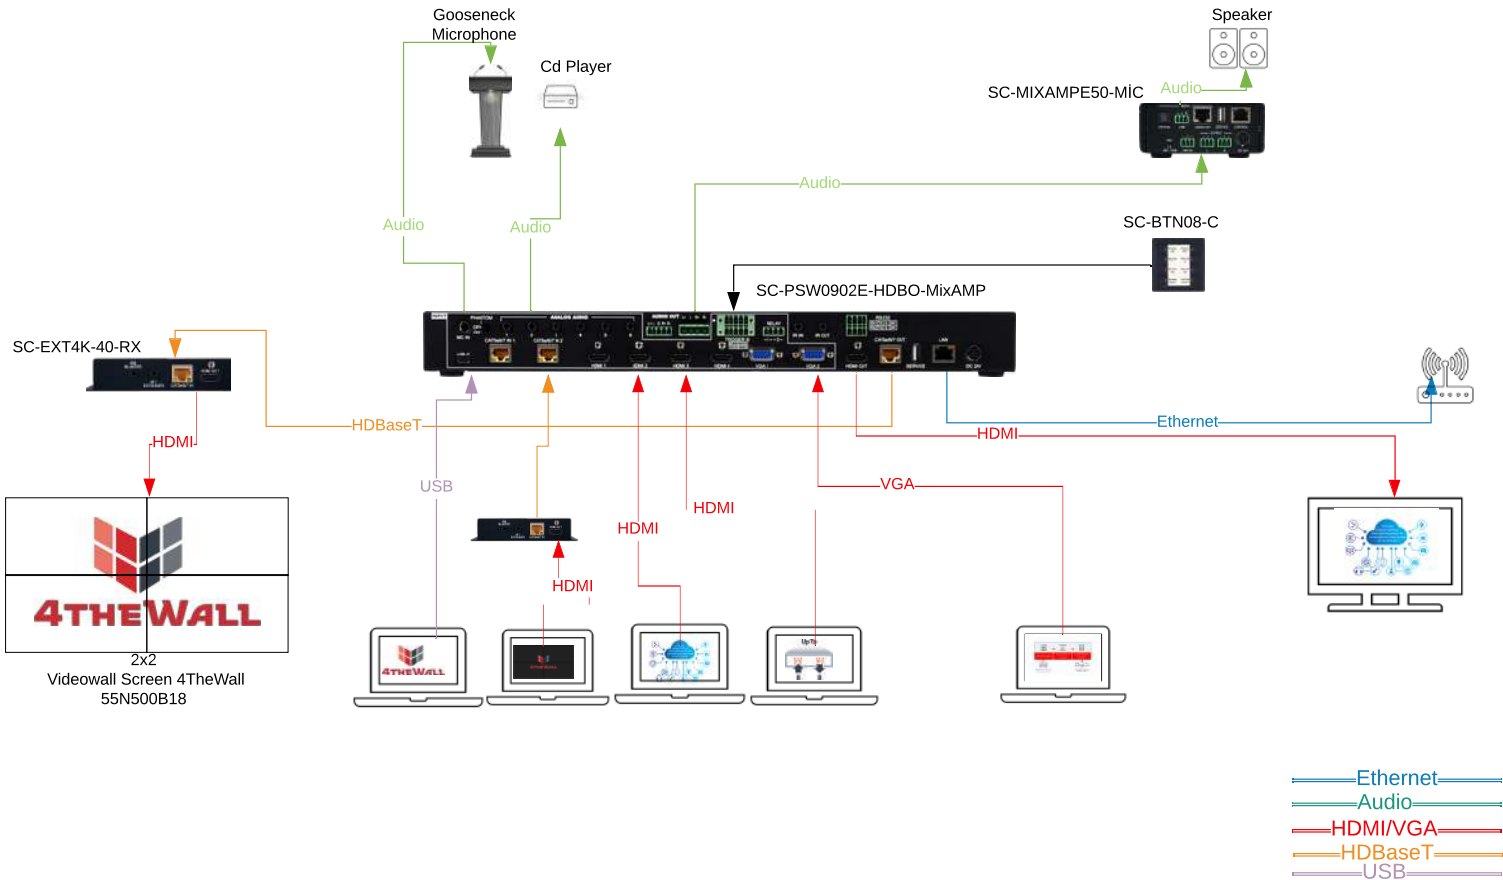

Input and Output	
Video Inputs	4x HDMI 2.0, 1 x USB-C , 2x VGA VE 2 x HDBaseT
Audio Inputs	6 Streo 3.5mm audio x 1 analog LR
Video Output	1 x HDMI, 1X HDBaseT
Audio Output	1 x analog audio output LR
Resolutions	Up to 4K@60 Hz 4:4:4
Network Features	
Ethernet	1x RJ45
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB
Management Options	Web Gui, RS232, Front Panel Buttons, Trigger, Telnet
General Features	
Power Connection	24V/ DC 6,25 Amp
Working Temperature	0°C~40°C
Humidity Range	20~90% RH
Storage Temperature	-20°C~60°C
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimensions	432mm × 43mm × 164mm - W/D/H
Weight	2547g
Power Value	53,966W
Mounting Type	Compatible with 19" 1U Rack Cabinet
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	432mm x 43mm x 174mm - W/D/H
Weight (packaged)	2720g
Packaged Content	1xSC-PSW0902E-HDBO-MixAMP, 1xConnector, 1xIR Extender Cable, 1x IR Cable, 1x User Manual



Front View



Rear