

SC-PWR0808E-115W-48V

Power Manager Device




- Supports 115 W
- 8 Power Output
- WebGUI and power analysis


SC-PWR0808E-115W-48V voltage control power manager device is an ideal for meeting rooms, conference rooms or VIP rooms

Features

- 1 Voltage controlled current management feature
- Supports 48V on each output
- Supports 2 pin 3.5mm 8 power output connection
- 115 W of total power provided across all 8 outputs
- Supports 19200 bps
- Ability to schedule power changes
- Controlled with Telnet and WebGUI

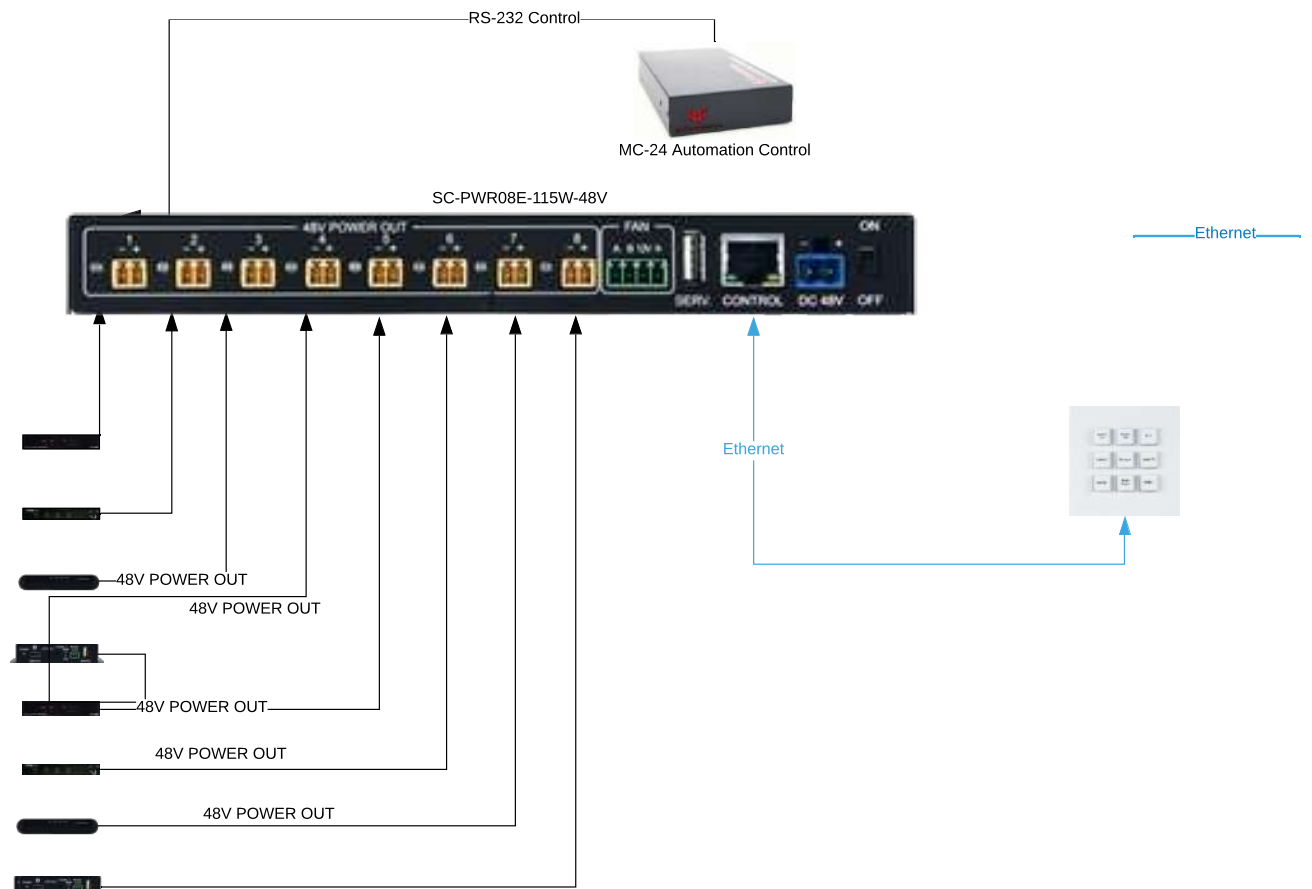

Input and Output	
Outputs	8 x 48V DC (2-pin Terminal Block) 2 x 12V DC (4-pin Terminal Block)
Output Features	2-pin Terminal Block and 4 pin Terminal Block
Network Features	
Ethernet	1 x RJ45
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	USB
Management Options	WebGUI, RS232
General Features	
Power Connections	48V/3.12A DC
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±12kV (air gap discharge) ±8kV (connection discharge)
Dimensions	211.5mm x 112mm x 24mm - W/D/H
Weight	285g
Power Value	143W
Mounting Type	Desktop
Certifications	
EU/US	DoC
Package Details	
Dimensions (packaged)	215.5mm x 120mm x 30mm - W/D/H
Weight (packaged)	300g
Package Contents	1 x SC-PWR08E-115W-48V, 8 x 48V Power Cable, 8 x 2 pin Power Adapter ,1 x 3.5mm 9 pin Adapter Cable, 48V/3.12A DC Power Adapter and Power Cable, 1 x User Manual



Front View



Rear View