

SC-PWR08E-120W-5V

Control Management Device




- 8x5V, 2x12V,
- 120 watt power on all 8 outputs, WebGUI, Telnet and RS232 management

SC-PWR08E-120W-5V easy-to-use control management device is an ideal for meeting rooms, conference rooms or VIP rooms.

Features

- Power management system providing voltage-controlled current (5V) on each output
- Battery backed up clock for scheduling power events
- Integrated WebGUI for control and power analysis
- Unit's overall maximum power consumption is only 140 watts
- Supports 8 power output ports with professional 2-pin 3.5mm terminal block connectors

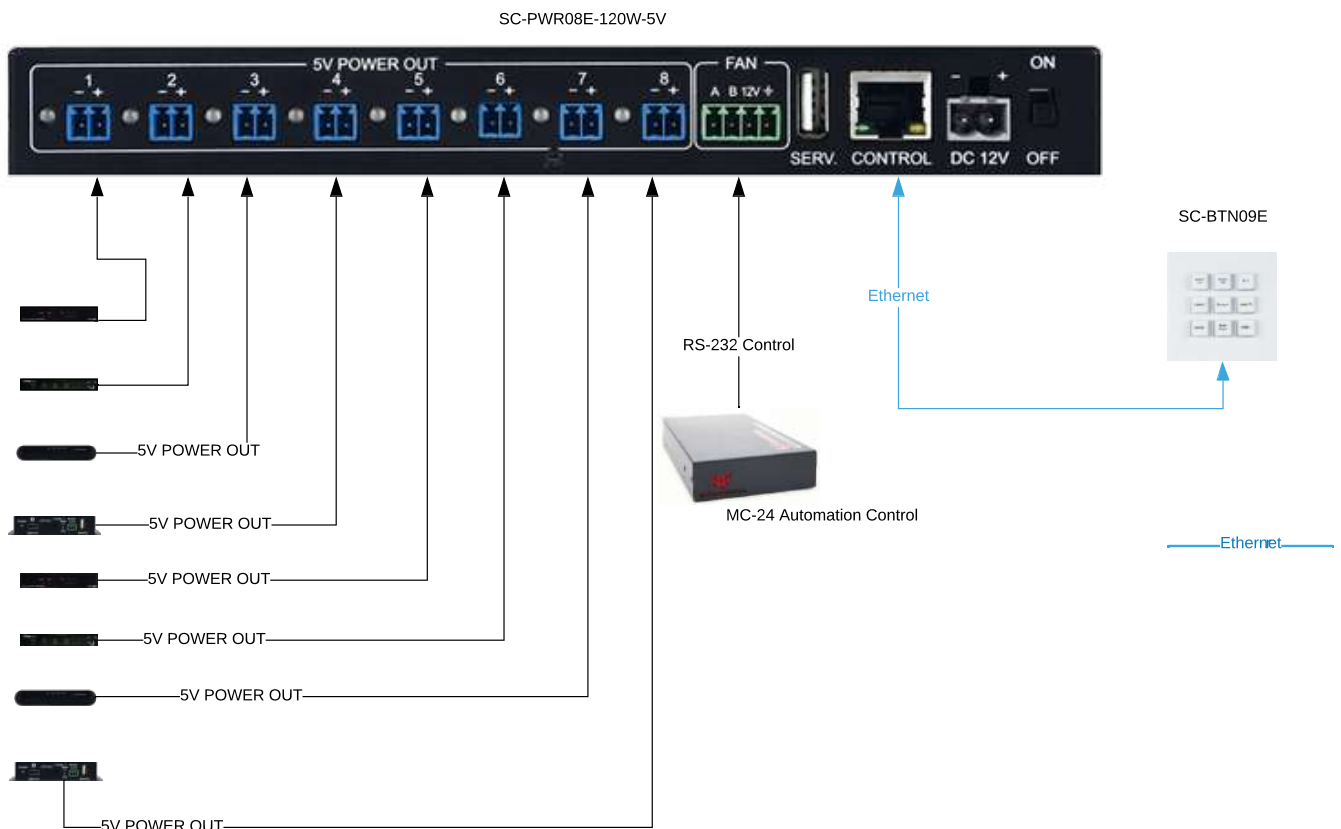

Technical Specifications

SC-PWR08E-120W-5V

Input and Output

Outputs	8x5V, 2x12V
Control	1xRS232 (3.5mm) 1xIP Control (RJ-45)
Output Features	192000bps

Network Features

Ethernet	1 x RJ45
IP Address Features	DHCP, Fixed IP

Management Features

Hardware Software Upgrade	USB
Management Options	WebGUI

General Features


Power Connections	12V 12.5A
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±12kV (air gap discharge) ±8kV (connection discharge)
Dimensions	211.5mm x 108mm x 24mm - W/D/H
Weight	372g
Power Value	140W
Mounting Type	Desktop

Certifications

EU/US	CE
-------	----

Package Details

Dimensions (packaged)	215mm x 110mm x 26mm - W/D/H
Weight (packaged)	390g
Package Content	1 x SC-PWR08E-120W-5V, 12V/12.5A DC Power Adaptor and Power Cable, 1 x Fan Gücü / Kontrol Kablosu ,1 x 3,5 mm - 9 pimli D-sub Adaptör Kablosu,Kullanım Kılavuzu



Önden Görünüm



Arkadan Görünüm