

# SC-SP010101R-HDBO

## 4K Splitter




- 18Gbps 4K@50/60Hz 4:4:4 8bit
- Supports HDCP 2.2 HDMI 2.0 HDBaseT 1.0
- EDID Support

4K supported splitter is an ideal solution for meeting rooms, conference halls or lecture halls

SC-SP010101R-HDBO's 1 HDMI and 1 HDBaseT output has the ability to split / distribute a single HDMI Input

### Features

- Supports 1 HDMI input, 1 HDBaseT and 1HDMI output
- Automatic 4K@60 Hz RGB / YUV 4:4:4 to 4:2:0 conversion
- Supports 12 Bit color depth on inputs and outputs
- Supports LPCM Bitstream and HD Bitstream audio formats
- RS232 and front panel control

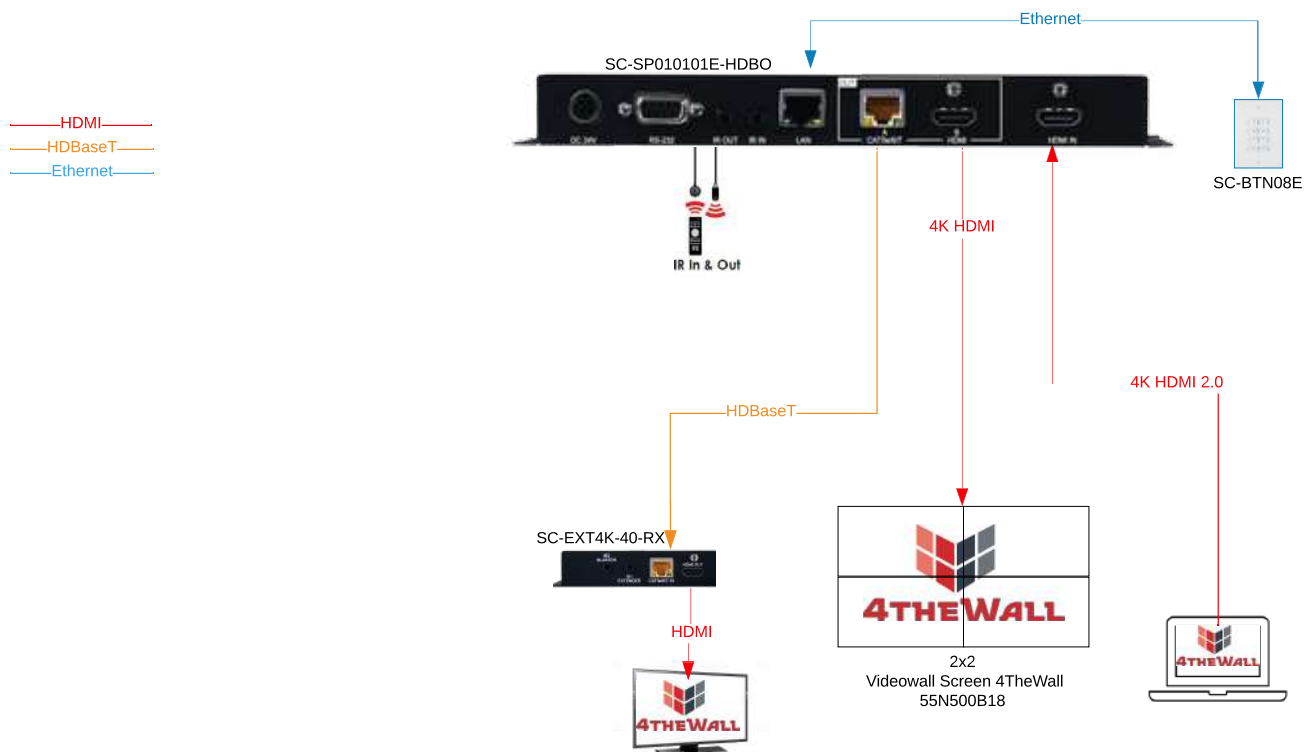

## Technical Specifications

## SC-SP010101R-HDBO

Input and Output	
Inputs	1 x HDMI 2.0
Input Features	Supports 4K@50/60Hz 4:4:4 8 bit
Outputs	1 x HDMI and 1 x HDBaseT
Output Features	Supports 4K@50/60Hz 4:4:4, 18 Gbps bandwidth Resolution support requiring bandwidth above 10.2Gbps requires an AVLC receiver compatible with HDBaseT.
Network Features	
Ethernet	1 x RJ45
Management Features	
Hardware Software Upgrade	USB port
Management Options	Front Panel, RS232
General Features	
Power Connections	24V DC 2.7A
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimensions	231.5mm × 108mm × 25mm - W/D/H
Weight	656g
Power Value	20.8W
Mounting Type	Desktop
Certifications	
EU/US	CE
Package Details	
Dimensions (packaged)	231.5mm x 115mm x 25mm - W/D/H
Weight (packaged)	680g
Package Content	1 x SC-SP010101R-HDBO , IR Cable , 1 x 24V/2.7A DC Power Adaptor and Power Cable, 1 x User Manual



Front View



Rear View