

SC-SW0401E-444

4K Matrix Switcher



- 4K@60Hz (4:4:4, 16bit)
- 4 x HDMI Input, 1 x HDMI Output
- 18 Gbps HDMI 2.0
- Supports EDID


This device is an ideal solution for meeting rooms , VIP rooms, lecture halls and data centers.

SC-SW0401E-444 has the ability to switch and display to selected content on the screen.

The device can control from RS-232 and Ethernet

Features

- Supports HDMI 2.0 and DVI 1.0
- Supports HDCP 2.2 and 1.4
- 4K UHD (18Gbps, 4K@50/60Hz 4:4:4, 16-bit) up to 1080p
- Supports LPCM 2.0/5.1/7.1, Bitstream and HD Bitstream audio formats
- Top button and RS232 control feature, IR control (optional)

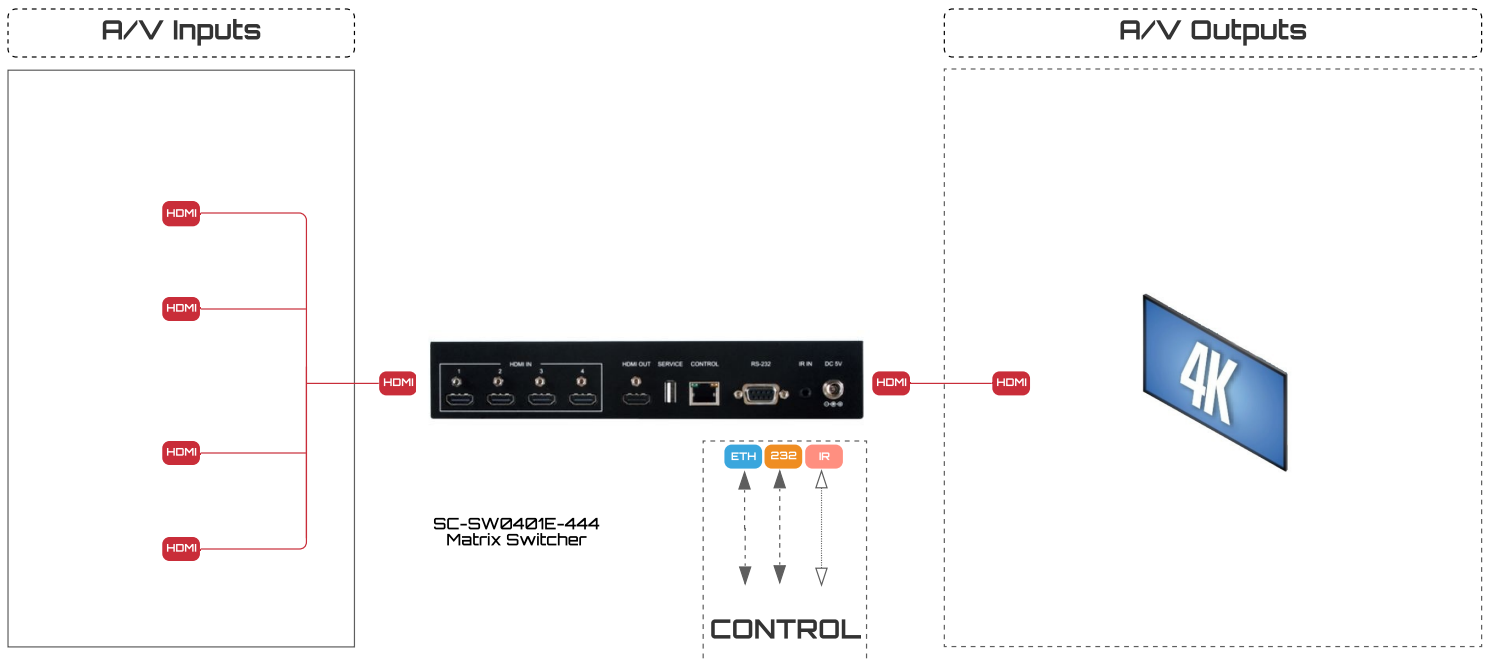

Technical Specifications

SC-SW0401E-444

Input and Output

Inputs	4xHDMI, 1xUSB(for service), 1xRS232, 1xRj45 (IP Control), 1x IR Extender
Outputs	1x4K HDMI
Resolutions	18Gbps Resolution 4K@60Hz (4:4:4, 8-bit)

Network Features

Ethernet	1x Rj45
IP Address Features	DHCP, Fixed IP

Management Features

Hardware Software Upgrade	USB, Web Interface
Management Options	Front Panel, Ethernet Telnet, Web Interface, IR

General Features

Power Connections	5V DC 2.6. Amp
Working Temperature	0°C~40°C
Humidity Range	20~90%
Storage Temperature	-20°C~60°C
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimensions	240mm × 104mm × 43mm - W/D/H
Weight	190g
Power Value	5.83W
Mounting Type	Compatible with 1U 19" rack cabinet

Certifications

EU/US	CE
-------	----

Package Details

Dimensions (packaged)	240mm x 112mm x 48mm - W/D/H
Weight (packaged)	210
Package Content	1x SC-SW0401E-444, 1x Remote Control Cable, 1x IR Extender Cable, 1x 5V/2.6A DC Power Adaptor, 1 x User Manual



Front View



Rear View